


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 12 TOWNSHIP 16 RANGE 2
DATE: 6-3-01 7-26-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 4-8-96

IN. S.P.C. E ZONE, NAD 83

NAME: 16021201
N: 511354.1450(m)
E: 48285.2190(m)

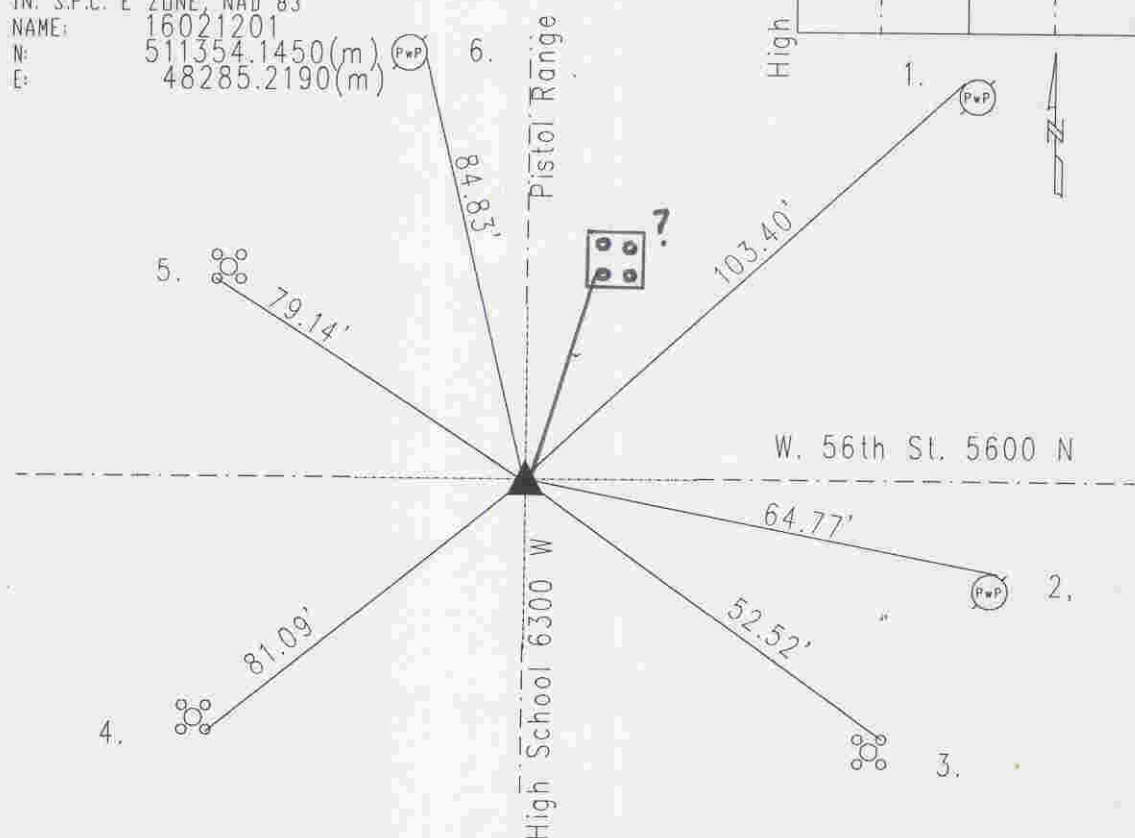

Original post set 1820 by Laughlin with witnesses: 7" beech N 78 E 8 links; 10" dogwood S 83 W 18 links per Marion County Atlas pg. 3. Hosbrook 1-18-1855 called no stone but witnesses: 35" oak N 30 E 22 links, 40" elm S 31 W 80 links per Pike Township Legal Survey Book pg. 5. Harris 6-14-55 called stone. Monroe 7-30-59 called steel pin. Schmidt 10-4-61 called the same. GWS 4-9-63 called the same. GWS 5-28-64 called the same. McLand 4-23-70 called a brass plug in steel box. McLand 1-27-75 called a brass plug. Wilcoxon 9-9-85 called the same. Kiste 10-3-94 called the same. Excavated by Wilcoxon 8-26-96. Harrison set in accordance with the 56th Street Construction Project. Re-tied 6-3-01 by Wilcoxon.

16021201

REF.	DISTANCE	DESCRIPTION
1.	103.40'	PK nail NW PwP#202-324 A 18"up
2.	64.77'	PK nail NE PwP#18-324 B 18"up
3.	52.52'	Cut 'x' NE-bolt of aluminum pole base
4.	81.09'	Cut 'x' SE-bolt of aluminum pole base
5.	79.14'	Cut 'x' SW-bolt of aluminum pole base
6.	84.83'	PK nail E PwP#42-324 A 24"up
7.	78.96'	Cut 'x' SW bolt signal pole base